

Digital Design & Computer Arch.

Lab 7 Supplement: Writing Assembly Code

Prof. Onur Mutlu

ETH Zurich

Spring 2020

23 March 2020

Writing Assembly Code

- In Lab 7, you will **write MIPS Assembly code**
- You will use the **MARS simulator** to run your code
- References
 - H&H Chapter 6
 - Lectures 9 and 10
 - <https://safari.ethz.ch/digitaltechnik/spring2020/doku.php?id=schedule>
 - MIPS Cheat Sheet
 - https://safari.ethz.ch/digitaltechnik/spring2020/lib/exe/fetch.php?media=mips_reference_data.pdf

An Example of MIPS Assembly Code

- Add all the even numbers from 0 to 10
 - $0 + 2 + 4 + 6 + 8 + 10 = 30$

High-level code

```
int sum = 0;
for(int i = 0; i <= 10; i += 2)
{
    sum += i;
}
```

MIPS assembly

```
# i=$s0; sum=$s1
        addi $s0, $0, 0
        addi $s1, $0, 0
        addi $t0, $0, 12
loop:   beq  $s0, $t0, done
        add  $s1, $s1, $s0
        addi $s0, $s0, 2
        j   loop
done:
```

Recall: Arrays: Code Example

- We first load the **base address of the array** into a register (e.g., \$s0) using **lui** and **ori**

High-level code

```
int array[5];

array[0] = array[0] * 2;

array[1] = array[1] * 2;
```

MIPS assembly

```
# array base address = $s0
# Initialize $s0 to 0x12348000
lui   $s0, 0x1234
ori   $s0, $s0, 0x8000


lw    $t1, 0($s0)
sll   $t1, $t1, 1
sw    $t1, 0($s0)
lw    $t1, 4($s0)
sll   $t1, $t1, 1
sw    $t1, 4($s0)
```

Lab 7: Exercise 1

- Write MIPS assembly code to compute the sum $A + (A + 1) + \dots + (B - 1) + B$, given two inputs A and B .
- Example
 - $A = 5, B = 10 \rightarrow S = 5 + 6 + 7 + 8 + 9 + 10 = 45$
- For this exercise, you can use a subset of MIPS instructions: **ADD, SUB, SLT, XOR, AND, OR and NOR**, which are the instructions supported by the ALU you designed in the previous labs
- Additionally, you are allowed to use **J, ADDI and BEQ**

Lab 7: Exercise 2

- Write MIPS assembly code to compute the **Sum of Absolute Differences** of two images

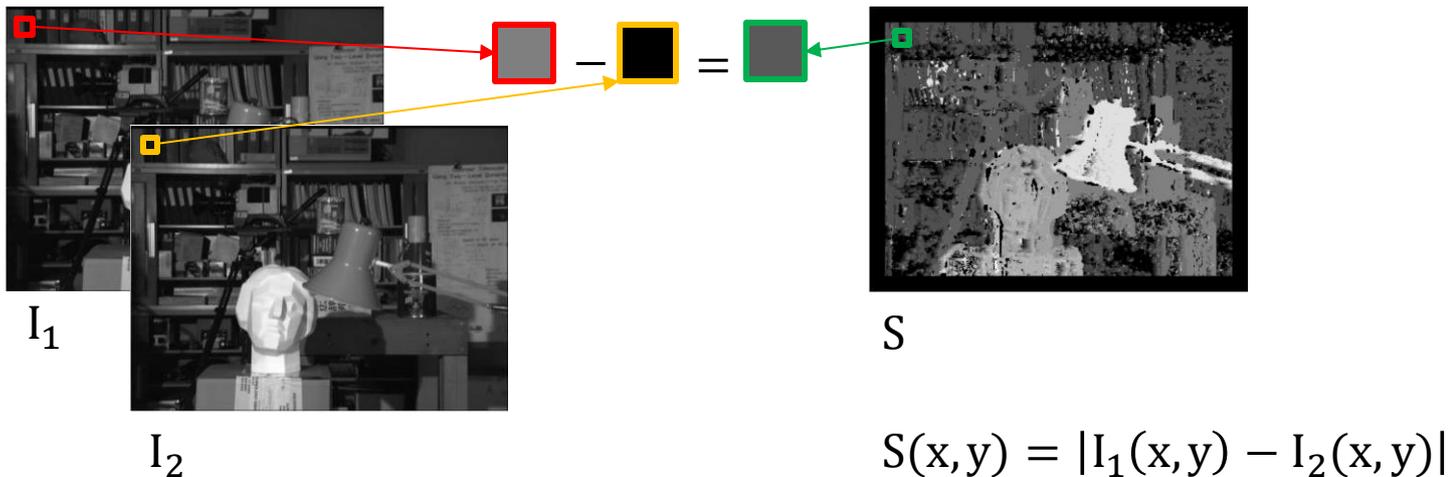

- Hints**

- Recall the **function calls** and the use of **the stack** in Lecture 10
- Read how to implement **recursive function calls** in H&H 6.4

Last Words

- In this lab, you will **do what a compiler does**: transforming high level code to MIPS assembly
- Exercise 1: Write **simple code** and get familiar with the **MARS simulator**
- Exercise 2: **Sum of Absolute Differences** of two images
- Find Exercise 3 in the lab report

Digital Design & Computer Arch.

Lab 7 Supplement: Writing Assembly Code

Prof. Onur Mutlu

ETH Zurich

Spring 2020

23 March 2020

Backup Slides

MIPS R-Type Instructions

| | |
|--------------|---|
| Description: | Add two registers and store the result in a register \$d. |
| Operation: | $\$d = \$s + \$t$; advance_pc (4); |
| Syntax: | add \$d, \$s, \$t |

ADD

| | |
|--------------|--|
| Description: | Subtract \$t from \$s and store the result in \$d. |
| Operation: | $\$d = \$s - \$t$; advance_pc (4); |
| Syntax: | sub \$d, \$s, \$t |

SUB

| | |
|--------------|--|
| Description: | If \$s is less than \$t, \$d is set to one. \$d gets zero otherwise. |
| Operation: | if $\$s < \t : $\$d = 1$; advance_pc (4); else: $\$d = 0$; advance_pc (4); |
| Syntax: | slt \$d, \$s, \$t |

SLT

| | |
|--------------|--|
| Description: | Exclusive or of \$s and \$t and store the result in \$d. |
| Operation: | $\$d = \$s \wedge \$t$; advance_pc (4); |
| Syntax: | xor \$d, \$s, \$t |

XOR

| | |
|--------------|--|
| Description: | Bitwise and of \$s and \$t and store the result in the register \$d. |
| Operation: | $\$d = \$s \& \$t$; advance_pc (4); |
| Syntax: | and \$d, \$s, \$t |

AND

| | |
|--------------|--|
| Description: | Bitwise logic or of \$s and \$t and store the result in \$d. |
| Operation: | $\$d = \$s \$t$; advance_pc (4); |
| Syntax: | or \$d, \$s, \$t |

OR

MIPS I-Type Instructions

| | |
|--------------|--|
| Description: | Add sign-extended immediate to register \$s and store the result in \$t. |
| Semantics: | $\$t = \$s + \text{imm}; PC = PC + 4;$ |
| Syntax: | addi \$t, \$s, imm |

ADDI

| | |
|--------------|---|
| Description: | Branch if the contents of \$s and \$t are equal. |
| Semantics: | if $\$s == \t : advance_pc (offset << 2)); else: $PC = PC + 4;$ |
| Syntax: | beq \$s, \$t, offset |

BEQ

MIPS J-Type Instructions

| | |
|--------------|--|
| Description: | Jump to the address. |
| Semantics: | $PC = nPC$; $nPC = (PC \& 0xf0000000) (target \ll 2)$; |
| Syntax: | j target |

J